



Factory 13/5 Speedwell St

Somerville VIC 3912

☎ 03 5978 8755

☎ 1800 001 018

www.RoofExtenda.com.au

SHADE SAIL ANCHOR INSTALLATION GUIDE FOR TILE ROOF


GENERAL INSTALLATION

- 1 Remove roofing tiles to achieve an opening to fit the Roof Extenda Shade Sail Anchor.
- 2 Bolt the section with the steel rod and the backing plate to the selected rafter using **4x M12 Hex Bolts**. Secure the anchor and backing plate to the wall top plate with **4x M10 Coach Screws** through the lower bottom holes.
- 3 Replace the roof tiles, cutting a hole to allow the loop to penetrate the roof.



CARE INSTRUCTIONS

Roof Extenda recommends painting or powder coating the Shade Sail Anchor before installation for additional corrosive protection. Shade Sail Anchors to be cleaned and inspected yearly and re-coated if required.

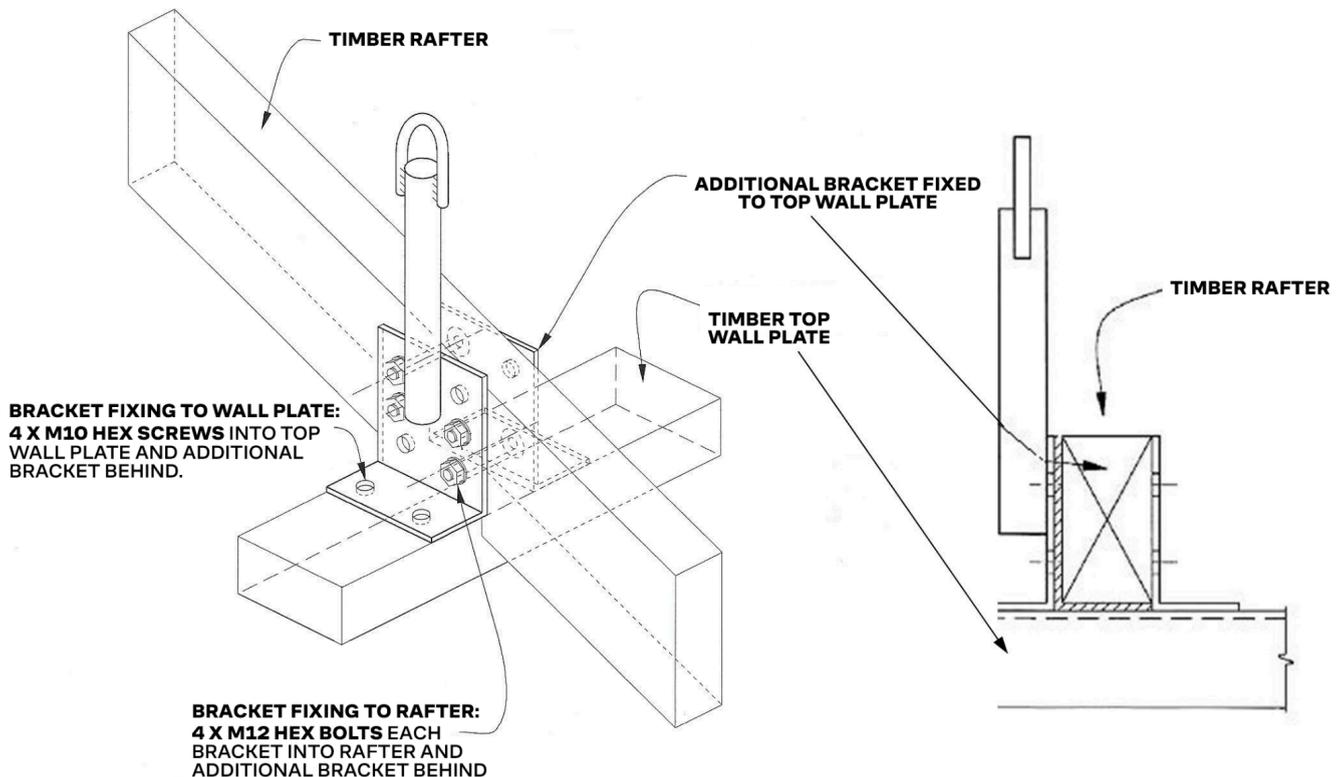

NOTE


Local Council or Shire approval may be required prior to construction. Roof Extenda accepts no responsibility for the type of construction undertaken. The Shade Sail Anchor has been strength tested. When bolted in the top holes, the Anchor can withstand up to 2.3kN of force. When bolted in the middle holes, the Anchor can withstand up to 1.3kN of force. We advise you to carefully evaluate the shade sail size, location, wind category & installation design before purchasing.

SHADE SAIL ANCHOR FLEXATILE INSTALLATION

- 1 Remove roofing tiles to achieve an opening to fit the Shade Sail Anchor.
- 2 Bolt the section with the steel rod and the backing plate to the rafter using **4x M12 Hex Bolts**. Secure the anchor & backing plate to the wall top plate with **4x M10 Coach Screws** through the lower bottom holes.
- 3 Replace the roof tiles, cutting a hole to allow the loop to penetrate the roof.
- 4 Ensure tiles are cleaned before installing the Flexatle to ensure the butyl adhesive strips can have maximum effect when bonded to the tiles.
- 5 Cut the rubber cone at least 15mm smaller than the anchor's outside diameter with a sharp pair of scissors. Ensure there are no accidental nicks in the polymer, as this will continue to split/tear over time.


Tip: Ensure the blades are sharp with no contamination e.g. glue or any accumulated dirt.

- 6 Remove the middle lining from the underside of the Flexatle, so the anchor is given access to the rubber boot.
- 7 Lubricate the anchor with water and slide the Flexatle down.
- 8 Form an anti-capillary fold at the top of the base sheet.
- 9 Remove the protective backing from the underside of the Flexatle, that is covering the butyl adhesive strips.
- 10 Hand form the base all around the tile and apply pressure to the butyl adhesive side strip.

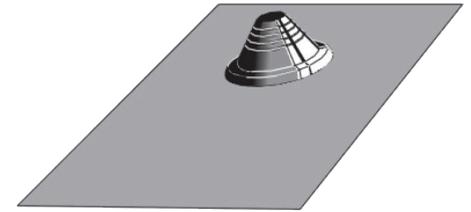


BASE SHEET CHOICE
a) ACRYFLASH
b) ALUMINIUM
c) RE-INFORCED POLYMER

CUT CONE TO EXACT CORRESPONDING PIPE DIAMETER. DO NOT USE A KNIFE

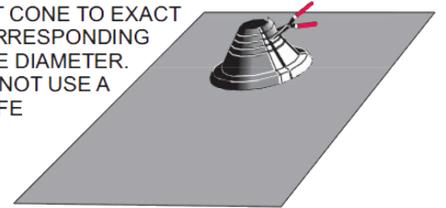

LUBRICATE PIPE WITH WATER TO SLIDE FLASHING DOWN

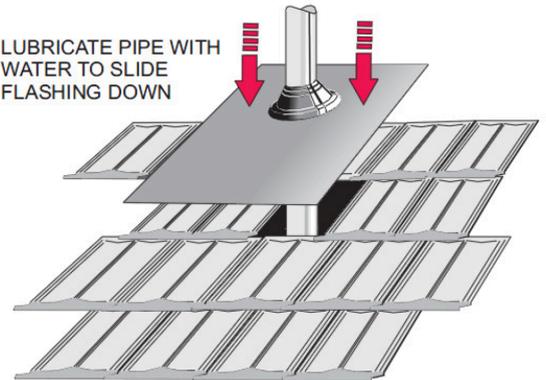

FORM AN ANTI-CAPILLARY FOLD AT THE TOP OF THE BASE SHEET

ENSURE ANTI CAPILLARY FOLD IS NOT DEFORMED AT TOP

